

## LED CEILING LIGHT

LED CEILING LIGHT






### BENEFITS

- Highly Efficient, no electromagnetic interference
- RoHS compliant – contains no mercury or lead
- Instant on, no delays
- High CRI for better visibility
- Light weight, easy to install
- Longer life leads to reduced maintenance and material cost
- Patent Microlens Light Extraction technology

### FEATURES

Model	LX120045W
CCT	3000K ~ 6500K
CRI	≥80
Voltage	100 ~240 VAC
Wattage	45 Watts
PFC	>0.985
Lumen	2500 LM
Efficacy	55.6Lm/W
Lighting Angel	79
Lux/2Meter	370±30
Operating Temp	-20C ~60C
Weight	3.5kg
Rated Life	>30,000 hrs
Size (mm)	1027 x 201 x 10.9

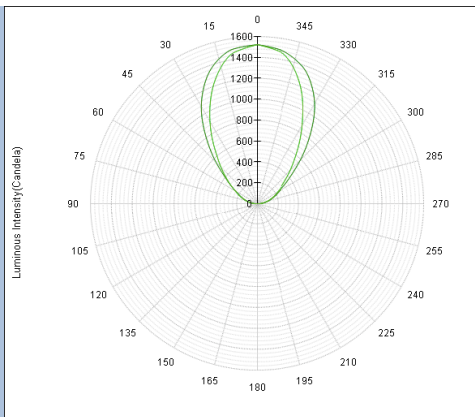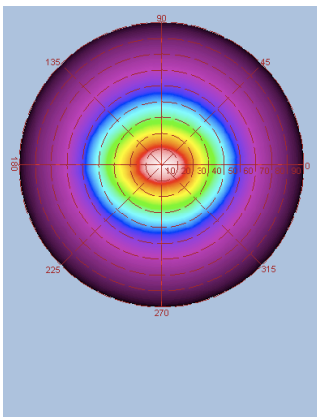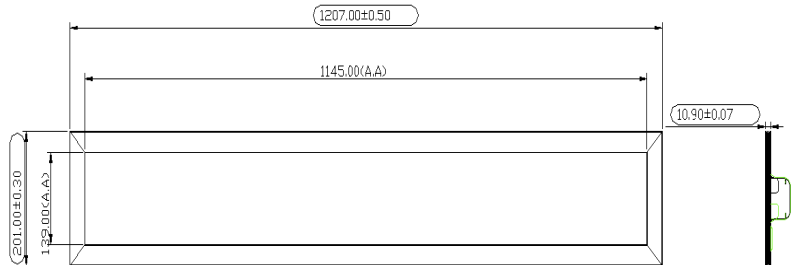

0.5	0.70 0.82	E(0°) 6054 E(C90) 35.1° 1661 E(C0) 39.4° 1402
1.0	1.41 1.64	E(0°) 1513 E(C90) 35.1° 415 E(C0) 39.4° 351
1.5	2.11 2.46	E(0°) 673 E(C90) 35.1° 185 E(C0) 39.4° 156
2.0	2.81 3.29	E(0°) 378 E(C90) 35.1° 104 E(C0) 39.4° 88
2.5	3.51 4.11	E(0°) 242 E(C90) 35.1° 66 E(C0) 39.4° 56
3.0	4.22 4.93	E(0°) 168 E(C90) 35.1° 45 E(C0) 39.4° 39